

SAW Filter 433.92MHz
Part No: MA05458

Model: TA0255A
REV. NO: 2

A. MAXIMUM RATING:

1. Input Power Level: 0dBm
2. DC voltage: 0V
3. Operating Temperature: -15°C to +60°C
4. Storage Temperature: -40°C to +85°C

B. ELECTRICAL CHARACTERISTICS:


Item	Unit	Min.	Typ.	Max.
Center frequency Fc	MHz	-	433.92	-
Insertion Loss IL min (reference level)	dB	-	2.3	3.5
3dB Bandwidth BW 3dB	MHz	4	7.7	-
Attenuation: (Reference level from IL min)				
Fc -100 to Fc -200 MHz	dB	56	64	-
Fc -25 to Fc -100MHz	dB	40	55	-
Fc -10.7MHz	dB	42	59	-
Fc +25 to Fc +100MHz	dB	40	60	-
Fc +100 to Fc +200MHz	dB	40	52	-
Source impedance Z _s	Ω	-	50	-
Load impedance Z _L	Ω	-	50	-

Note: IL min is the minimum of the pass band attenuation. The center frequency Fc is the mean value of the upper and lower frequencies at the 3dB filter attenuation level relative to the IL min.

SAW Filter 433.92MHz
Part No: MA05458

Model: TA0255A
REV. NO: 2


C. FREQUENCY CHARACTERISTICS:

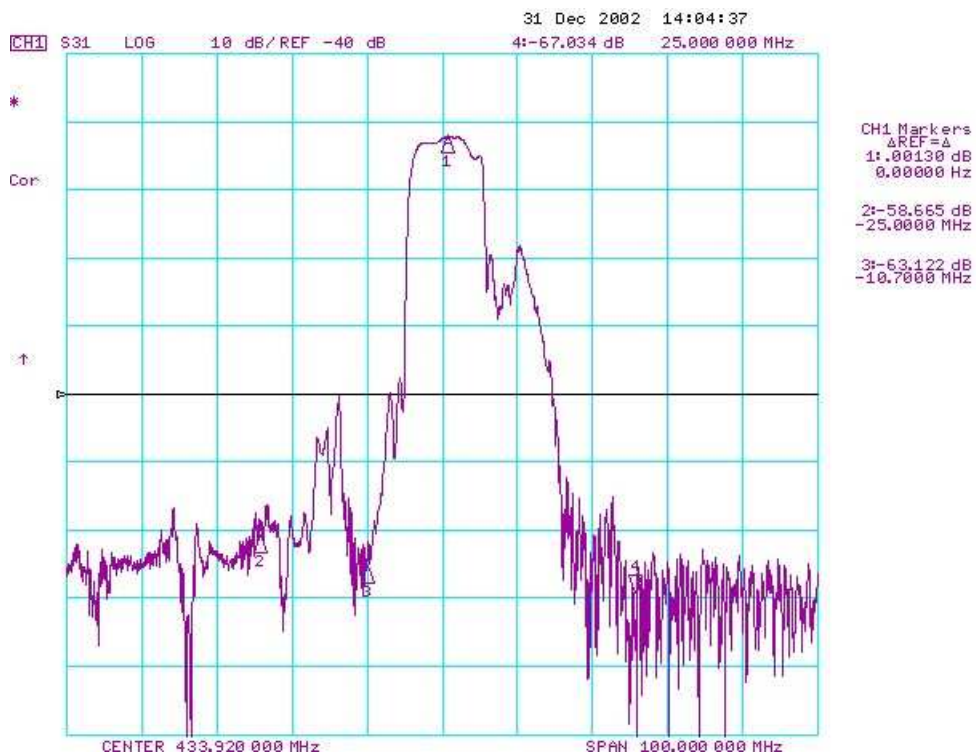

SAW Filter 433.92MHz
Part No: MA05458

Model: TA0255A
REV. NO: 2

D. MEASUREMENT CIRCUIT:

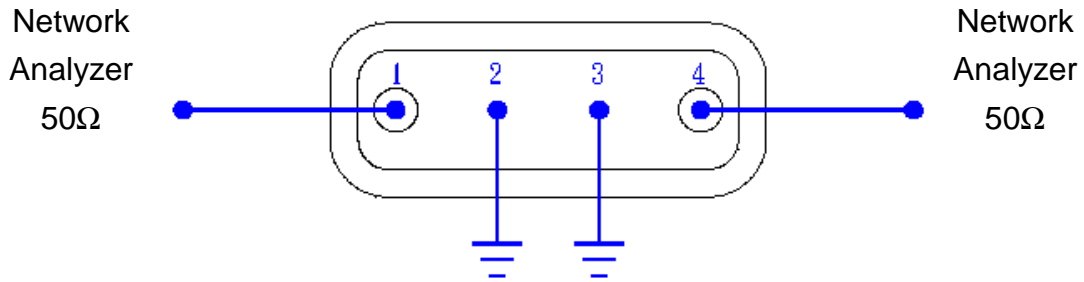

E. OUTLINE DRAWING:

