
70 MHz IF SAW Filter - Low loss**Model: TB0211A****Part No: MA05394****REV NO.: 1**

A. Maximum Rating:

1. Input Power Level: +20 dB_m
2. Operating Temperature: -10°C to +70°C
3. Storage Temperature: -40°C to +85°C

B. Electrical Characteristics:


Parameters	Unit	Min.	Typical	Max.
Center frequency, F _c	MHz	69.8	70	70.2
Insertion Loss, IL	dB	-	8.0	9.5
1 dB Bandwidth	MHz	3.4	3.6	-
3 dB Bandwidth	MHz	4.0	4.45	-
40 dB Bandwidth	MHz	-	7.18	8.0
Relative Attenuation:				
10 to 64.5 MHz	dB	40	45	-
74 to 140 MHz	dB	40	43	-
Amplitude ripple within F _c ± 1.5 MHz	dB	-	0.9	1.0
Group Delay ripple within F _c ± 1.5 MHz	nsec	-	190	220
Substrate Material	-	-	YZ-LN	-
Temperature Coefficient of frequency	ppm/ °C	-	-94	-

70 MHz IF SAW Filter - Low loss
Part No: MA05394


Model: TB0211A
REV NO.: 1

C. Frequency Characteristics:

(1) Frequency Response

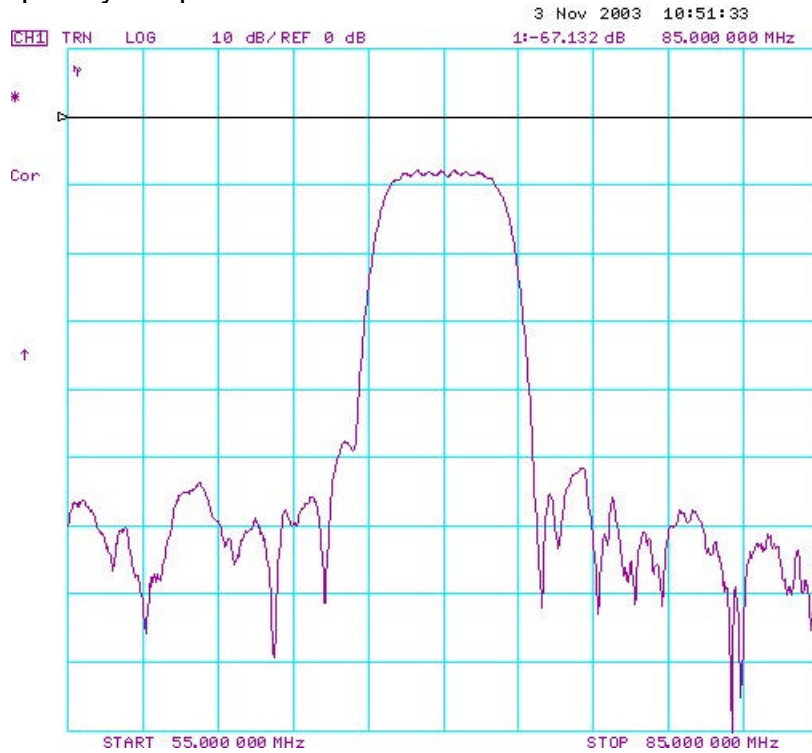

(2) Passband response and Group Delay Variation

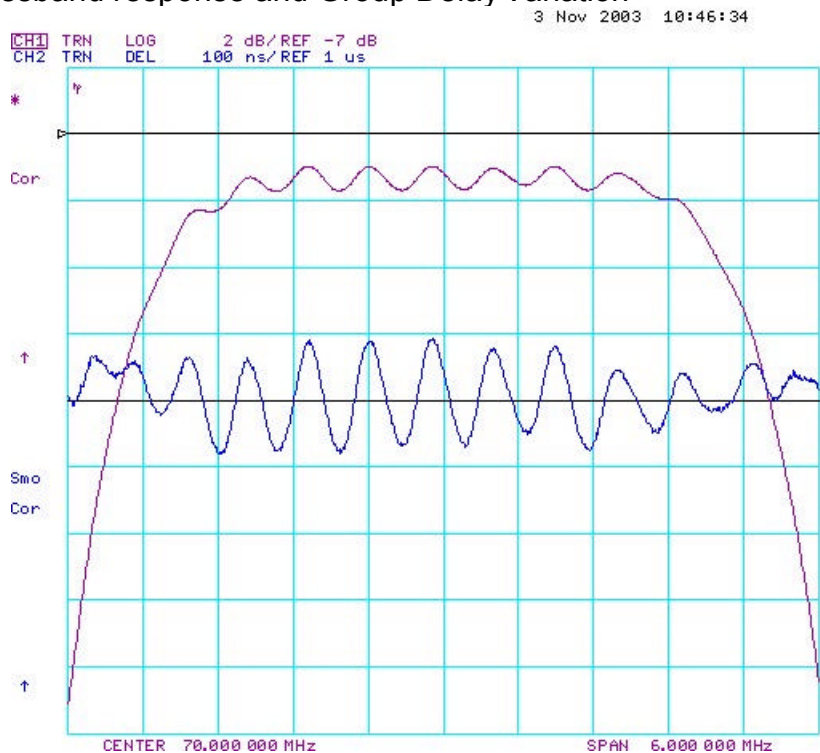


70 MHz IF SAW Filter - Low loss
Part No: MA05394

Model: TB0211A
REV NO.: 1

D. Measurement Circuit:


Source and load impedance: 50 Ω

Network analyzer

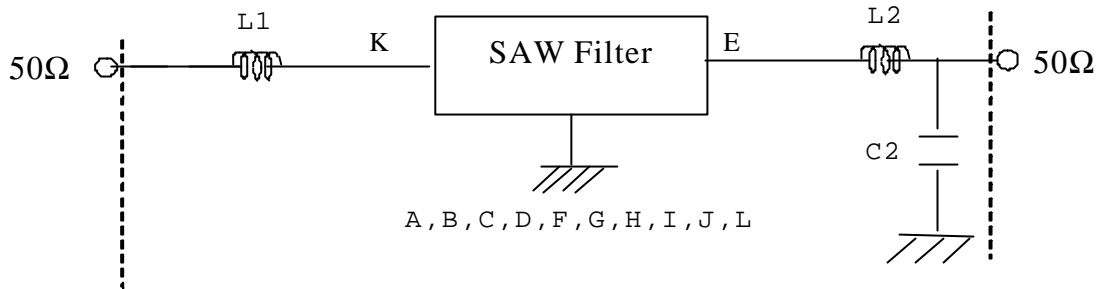

Input: L1=220 nH, Q>40
 Output: L2=100 nH, Q>40; C2=22 pF

E. Outline Drawing:

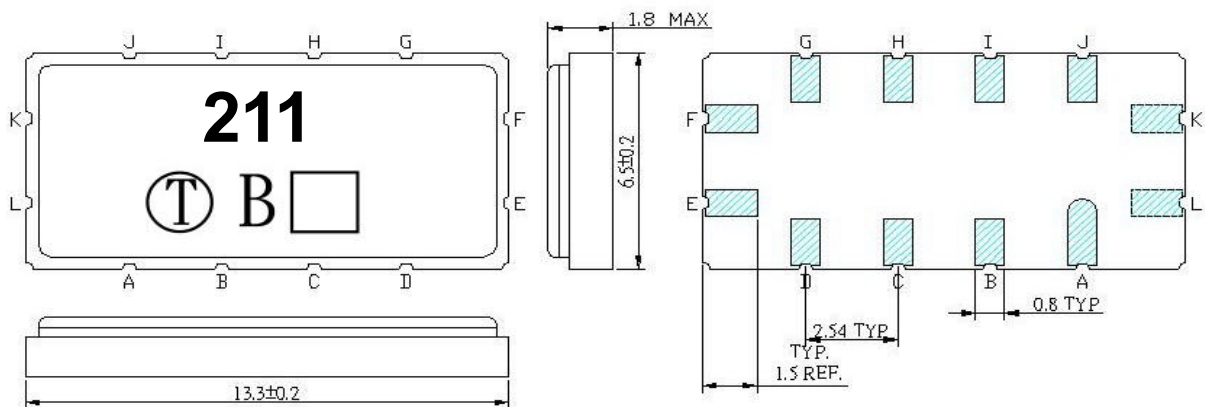

Unit: mm

Pin K: RF Input Pin E: RF Output Pin L: Input Ground	Pin F: Output Ground Pin A, B, C, D, G, H, I, J: To be Ground ?: Date code
--	--