

36.1250MHz IF SAW Filter

Model: TB0244A

Part No: MA05794

REV. NO.: 1

A. FEATURES:

1. IF Filter for Digital Cable TV

B. MAXIMUM RATING:

1. DC voltage: 12 V.
2. Storage Temperature: -40°C to +85 °C.
3. Operating Temperature: -25 °C to +65 °C

C. ELECTRICAL CHARACTERISTICS:

Characteristic	Units	Minimum	Typical	Maximum
Center frequency, F_o	MHz	-	36.125	-
Insertion Loss, IL	dB	-	28.5	31
Bandwidth -1dB	MHz	-	7.3	-
Bandwidth -3dB	MHz	-	7.8	-
Bandwidth -30dB	MHz	-	9.3	-
Relative attenuation				
32.32MHz	dB	0.5	2.63	3.5
39.93MHz	dB	0.5	1.51	3.5
32.13MHz	dB	3.5	4.8	6.5
40.13MHz	dB	2.2	3.33	5.2
31.25MHz	dB	35	40	-
47.25MHz	dB	42	58	-
Lower Sidelobe (25 ~31.25MHz)	dB	34	40	-
Upper Sidelobe (40.9~50MHz)	dB	30	35	-
Temp.coeff.	ppm/K	-	-72	-

36.1250MHz IF SAW Filter
Part No: MA05794

Model: TB0244A
REV. NO.: 1

D. FREQUENCY CHARACTERISTICS:

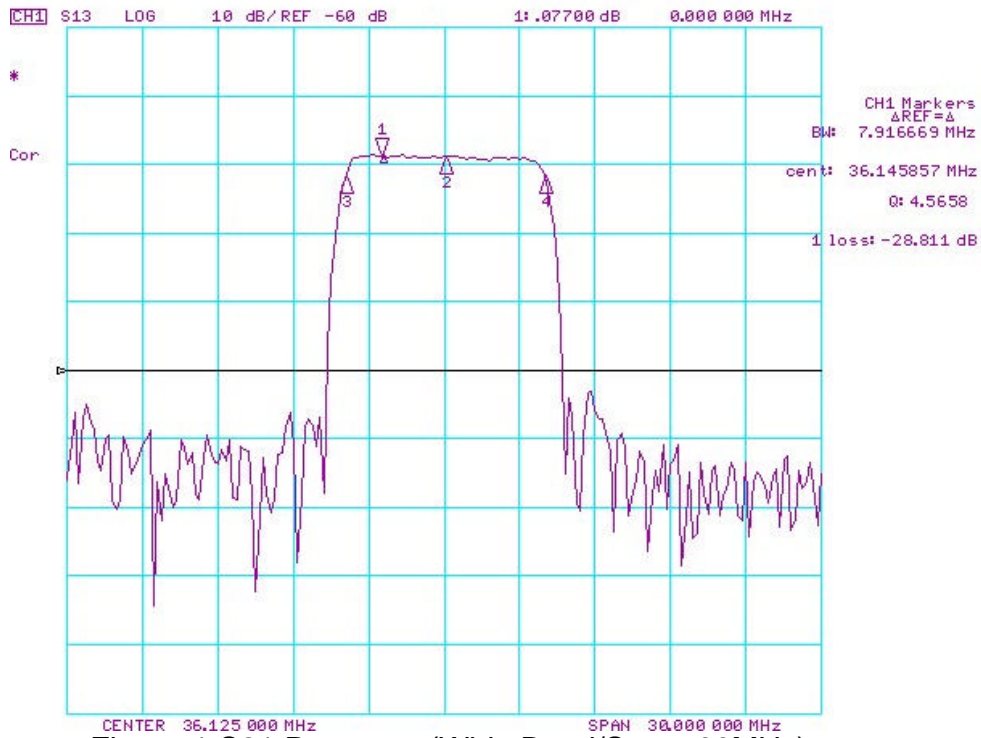


Figure-1 S21 Response(Wide Band/Span=30MHz)


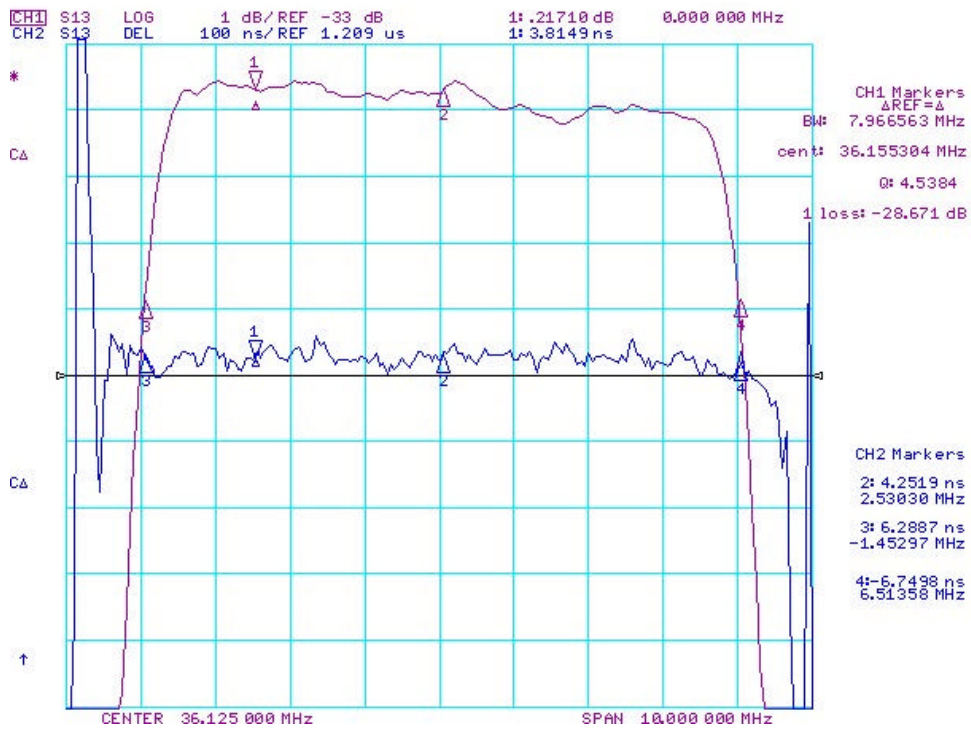


Figure-2 S21 Response(Pass Band/Span=10MHz)

36.1250MHz IF SAW Filter
Part No: MA05794

Model: TB0244A
REV. NO.: 1

E. OUTLINE DRAWING:

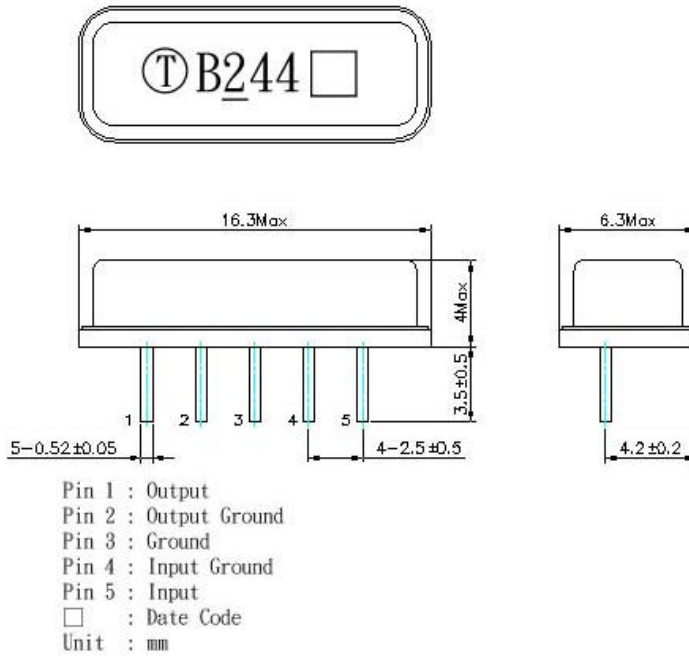

F. TEST CIRCUIT

