

SAW Filter 140.0MHz

Model: TB0218A

Part No: MA06842

REV. NO.: 5

A. MAXIMUM RATING:

1. Input Power Level: 10 dBm
2. Operating Temperature: -40°C to 85°C
3. Storage Temperature: -40°C to 85°C


RoHS Compliant
 Lead free
 Lead-free soldering

B. ELECTRICAL CHARACTERISTICS:

1. Ambient Temperature: 25 °C

Item	Unit	Min.	Type.	Max.	Note
Center frequency, F_c	MHz	139.915	140	140.085	1
Minimum Insertion Loss, IL	dB	-	7	8	-
Amplitude Ripple in F_c±0.12MHz, AR	MHz	-	0.6	1.5	-
Group delay ripple in F_c±0.15MHz	ns	-	200	500	-
1dB Bandwidth	MHz	0.4	0.47	-	-
40dB Bandwidth	MHz	-	1.47	1.6	-
Relative attenuation (relative to min. IL)	-				
110 MHz ~ F_c-1MHz	dB	35	41	-	-
F_c+1MHz ~ 170MHz	dB	35	39	-	-

C. MEASUREMENT CIRCUIT:

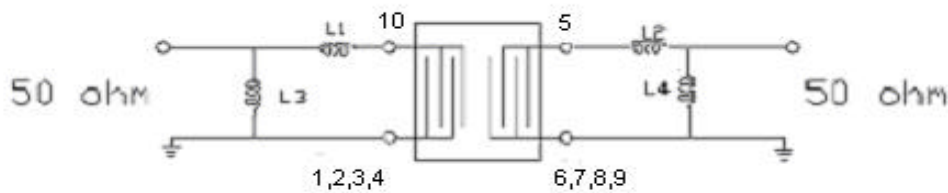

**Input L1=39nH, L3=22nH
 Output L2=33nH, L4=22nH**

SAW Filter 140.0MHz
Part No: MA06842

Model: TB0218A
REV. NO.: 5

D. FREQUENCY CHARACTERISTICS:

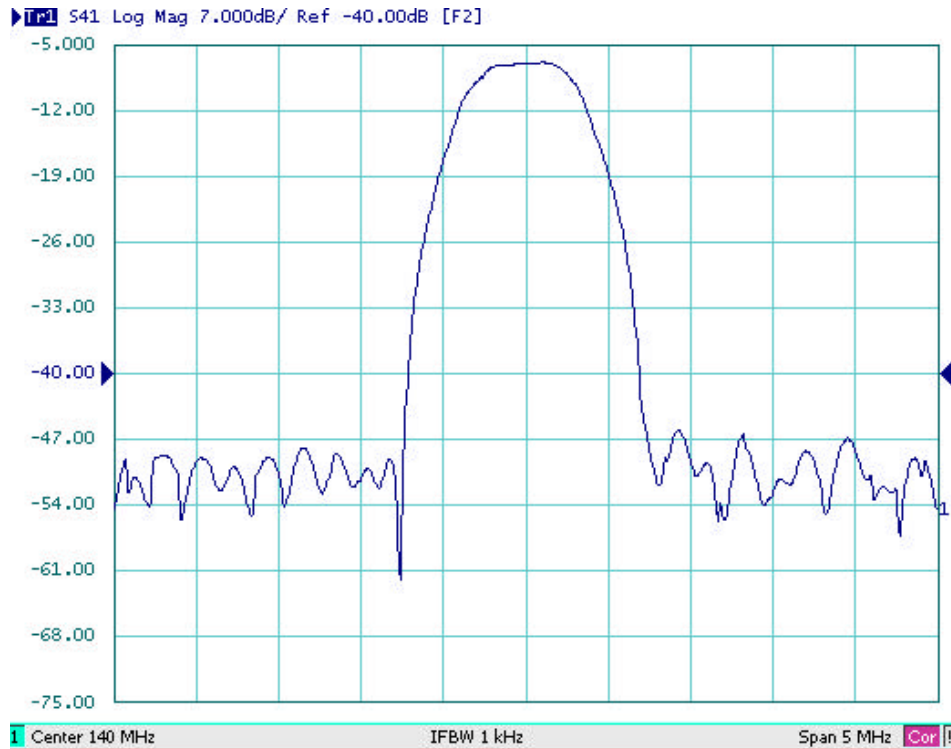


Fig-1 S21 Response Horizontal: 0.5MHz/Div
Vertical: 7dB/Div

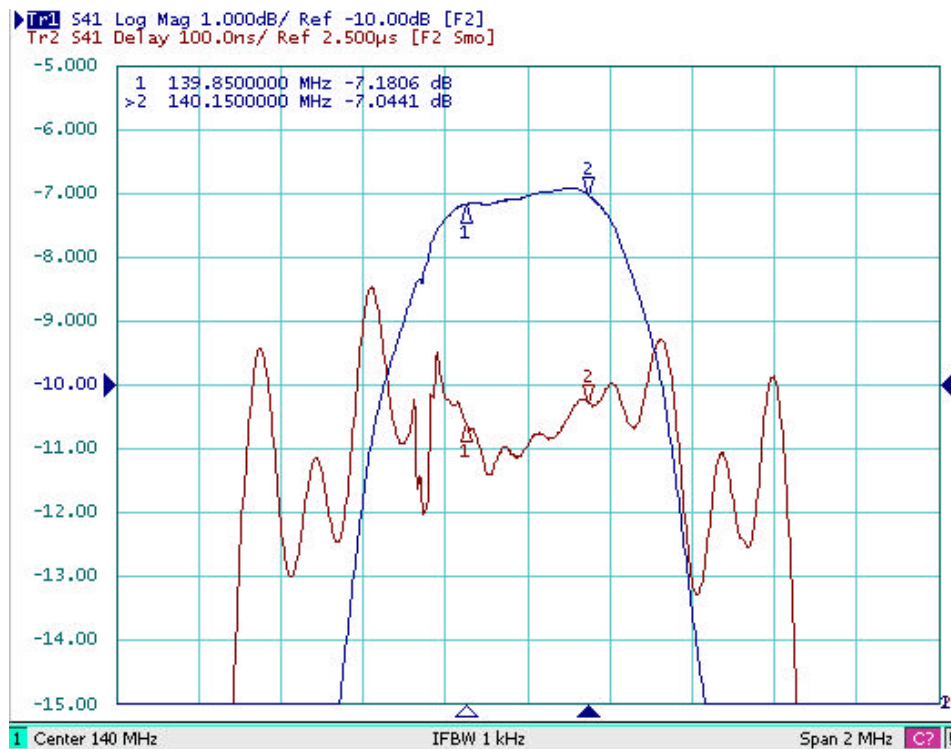


Fig-2 Horizontal: 200KHz/Div Vertical: 1dB/Div
Vertical: 100ns/Div


SAW Filter 140.0MHz

Model: TB0218A


Part No: MA06842

REV. NO.: 5

E. OUTLINE DRAWING:

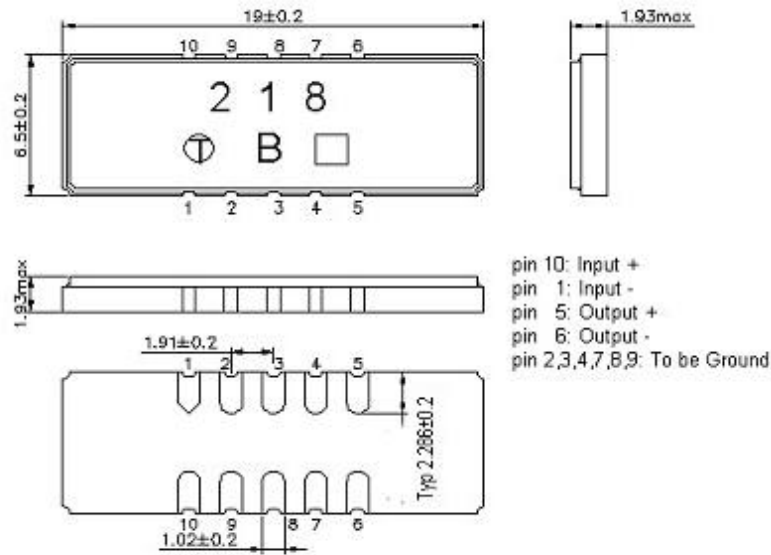

F. PCB FOOTPRINT:

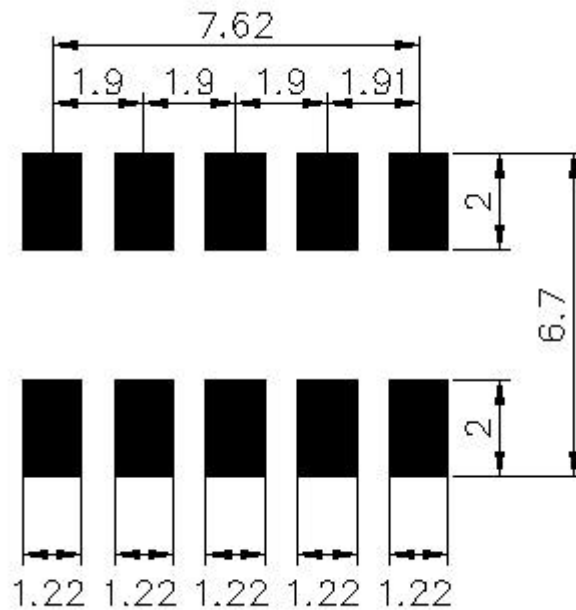

SAW Filter 140.0MHz

Model: TB0218A

Part No: MA06842

REV. NO.: 5

H. MECHANICAL & ENVIRONMENT CHARACTERISTICS:

Test Item	Condition of Test	Requirements
Shock (Drop test)	random free drops 3 times from height of 1.0 meter onto hard wood.	The specimens shall meet the electrical specifications
Vibration	Total peak amplitude : 1.5mm Vibration frequency : 10 to 55 Hz Sweep period : 1.0 minute Vibration directions : 3 mutually perpendicular Duration : 2 hr / direc.	
Solderability	immersed pad in soldering bath at 260±5°C for 5±0.5 seconds.	75% or more of the immersed surface shall be covered with solder
Temperature Characteristics	Specimens shall be measured within -40°C to +85°C temperature range	The specimens shall meet the electrical specifications
Dry heat (Aging test)	Temperature : 125 ± 2 °C Duration : 250 hours	
Cold resistance	Temperature : -40 ± 3 °C Duration : 96 hours	
Thermal Shock	Heat cycle conditions -55 C 25 C 85 C (30 min) (5 min) (30 min) Cycle time : 5 times	

SAW Filter 140.0MHz
Part No: MA06842

Model: TB0218A
REV. NO.: 5

I. REFLOW PROFILE:

