

---

**433.920MHz SAW Filter****Model: TA0649A****Part No: MA09182****REV NO.: 2**

---

**A. MAXIMUM RATING:**

1. Input Power Level: 10 dBm
2. DC voltage: 3 V
3. Operating Temperature: -10°C to 60°C
4. Storage Temperature: -40°C to +85° C

**B. CHARACTERISTICS:**



Item	Unit	Min.	Typical	Max.
Center frequency Fc	MH	-	433.92	-
Insertion loss 433.00 ~ 434.71 MHz IL	dB	-	2.0	2.7
Amplitude ripple 433.00 ~ 434.71 MHz	dB	-	0.3	1.3
Attenuation (Reference level from 0 dB)				
389.0 ~ 392.0 MHz	dB	42	54	-
411.0 ~ 414.0 MHz	dB	40	50	-
454.0 ~ 457.0 MHz	dB	40	51	-
475.5 ~ 478.5 MHz	dB	42	52	-
Source impedance Zs	Ω	-	50	-
Load impedance ZL	Ω	-	50	-

Note1. No matching network required for operation at 50Ω

**433.920MHz SAW Filter**  
**Part No: MA09182**

**Model: TA0649A**  
**REV NO.: 2**

**C. TRANSFER FUNCTION:**

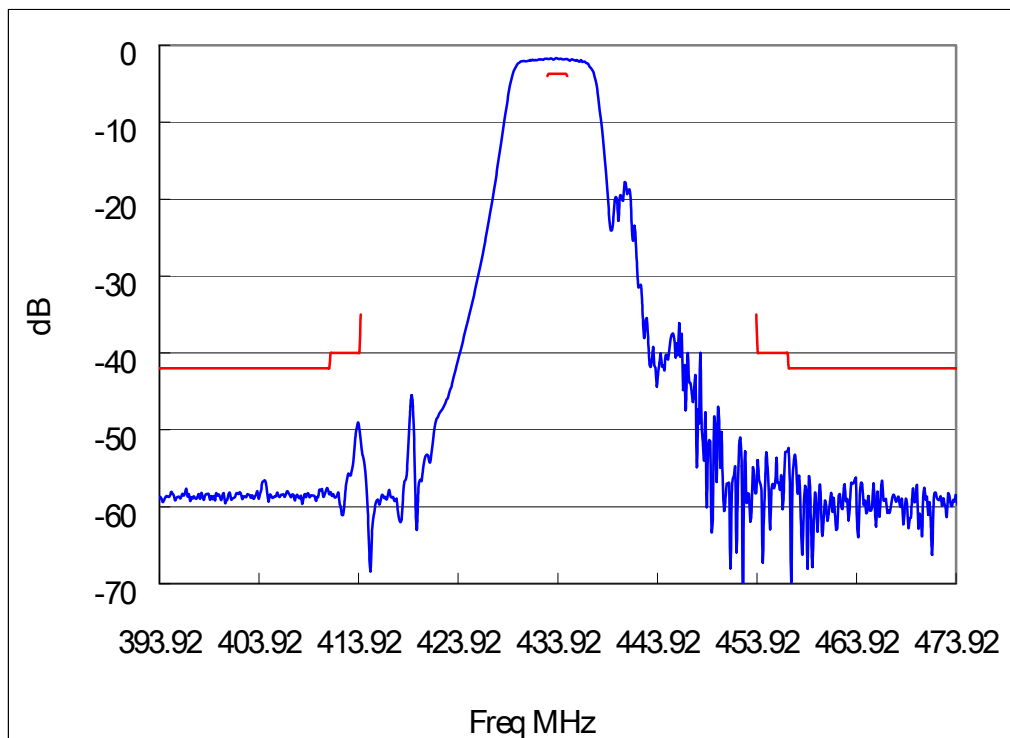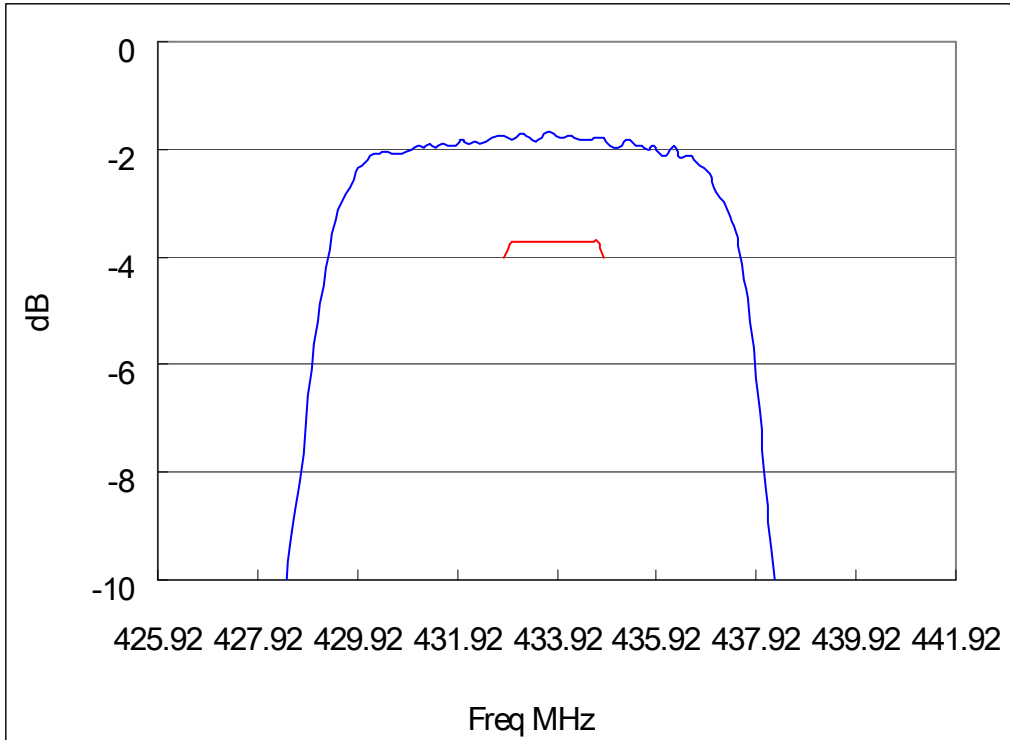


**433.920MHz SAW Filter**

**Model: TA0649A**


**Part No: MA09182**

**REV NO.: 2**


**D. MEASUREMENT CIRCUIT:**

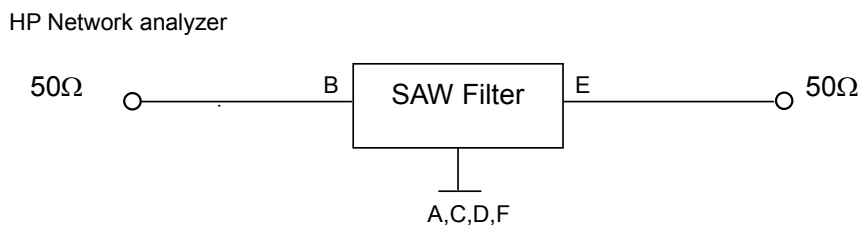

**E. OUTLINE DRAWING:**

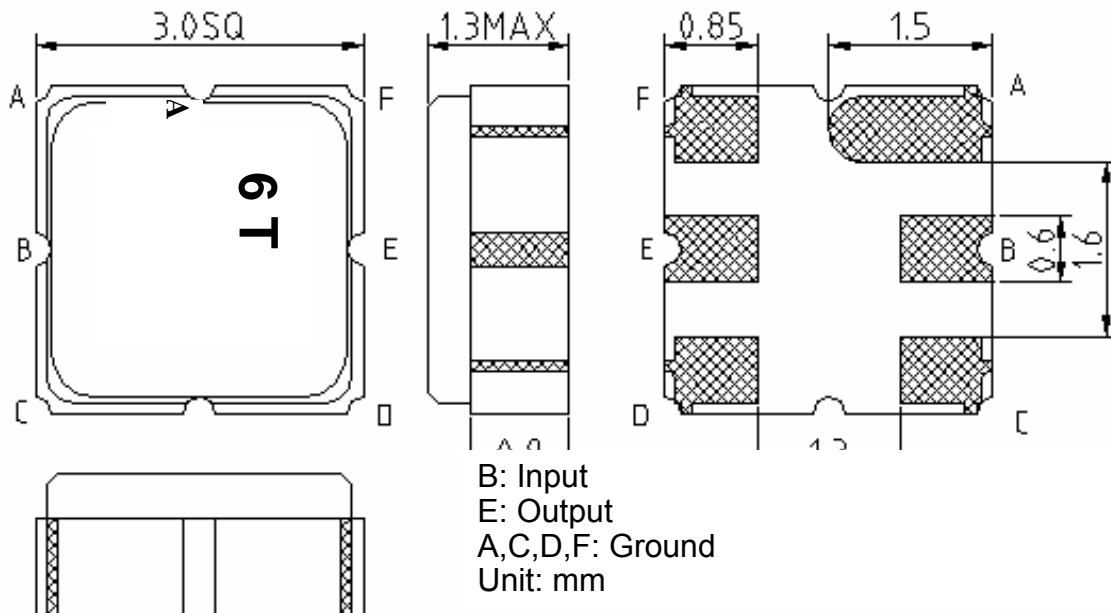

**F. PCB FOOTPRINT:**

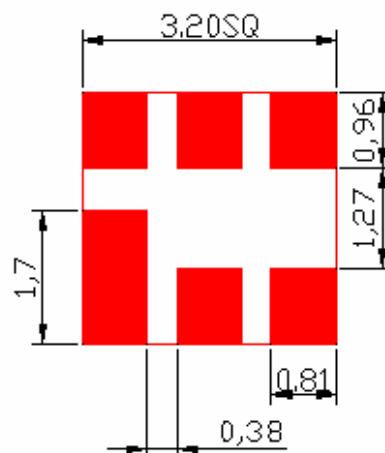

**433.920MHz SAW Filter**


**Model: TA0649A**

**Part No: MA09182**


**REV NO.: 2**

**G. PACKING:**

**1. REEL DIMENSION**

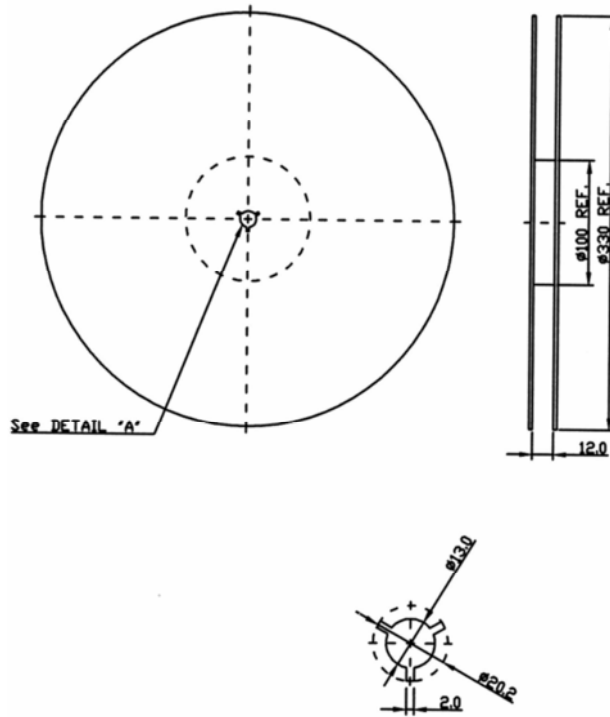

**2. TAPE DIMENSION**

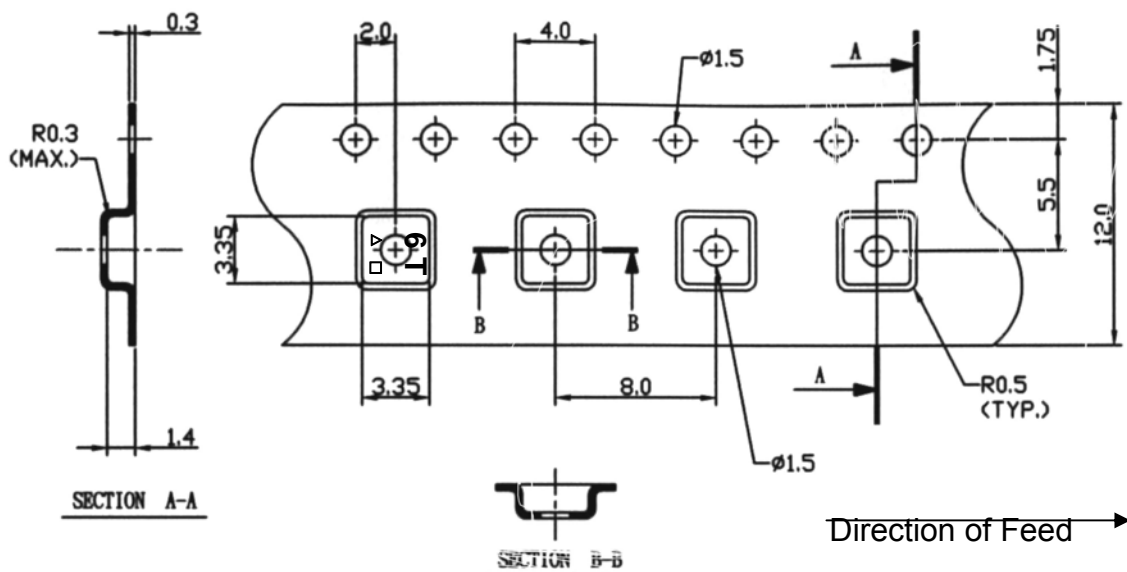

**433.920MHz SAW Filter**  
**Part No: MA09182**

**Model: TA0649A**  
**REV NO.: 2**

**H. RECOMMENDED REFLOW PROFILE:**

