

**315.00MHz SAW Filter**

**Model: TA0657A**

**Part No: MA09183**

**REV NO.: 1**

**A. MAXIMUM RATING:**

1. Input Power Level: 10 dBm
2. DC voltage: 3 V
3. Operating Temperature: -40°C to 85°C
4. Storage Temperature: -40°C to +85° C

**B. CHARACTERISTICS:**



Item	Unit	Min.	Typical	Max.
Center frequency Fc	MHz	-	315	-
Maximum Insertion loss 314.70 ~ 315.30 MHz IL	dB	-	1.52	2.5
Amplitude ripple 314.70 ~ 315.30 MHz	dB	-	0.4	1.2
VSWR 314.70 ~ 315.30 MHz			1.4	1.6
Attenuation (Reference level from Max IL dB)				
270.0 ~ 286.0 MHz	dB	55	65	-
293.0 ~ 293.9 MHz	dB	53	60	-
304.0 ~ 304.6 MHz	dB	48	60	-
325.4 ~ 326.0 MHz	dB	24	30	-
336.1 ~ 337.0 MHz	dB	36	52	-
357.5 ~ 358.7 MHz	dB	50	60	-
Source impedance Zs	Ω	-	50	-
Load impedance ZL	Ω	-	50	-
Temperature coefficient	ppm/k	-	-36	-

Note1. No matching network required for operation at 50Ω

**315.00MHz SAW Filter**  
**Part No: MA09183**

**Model: TA0657A**  
**REV NO.: 1**


**C. TRANSFER FUNCTION:**

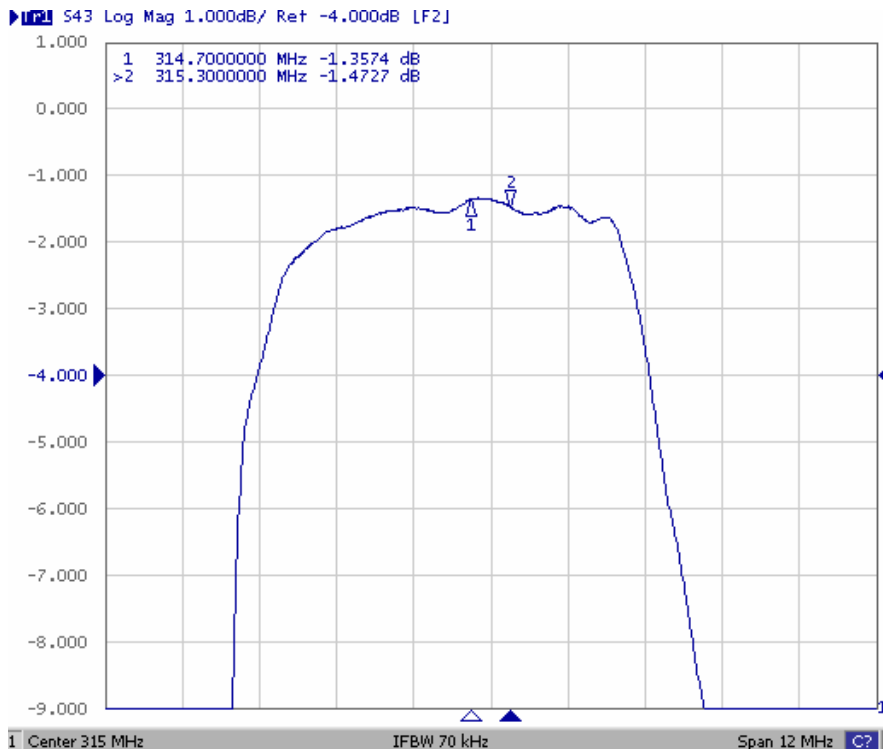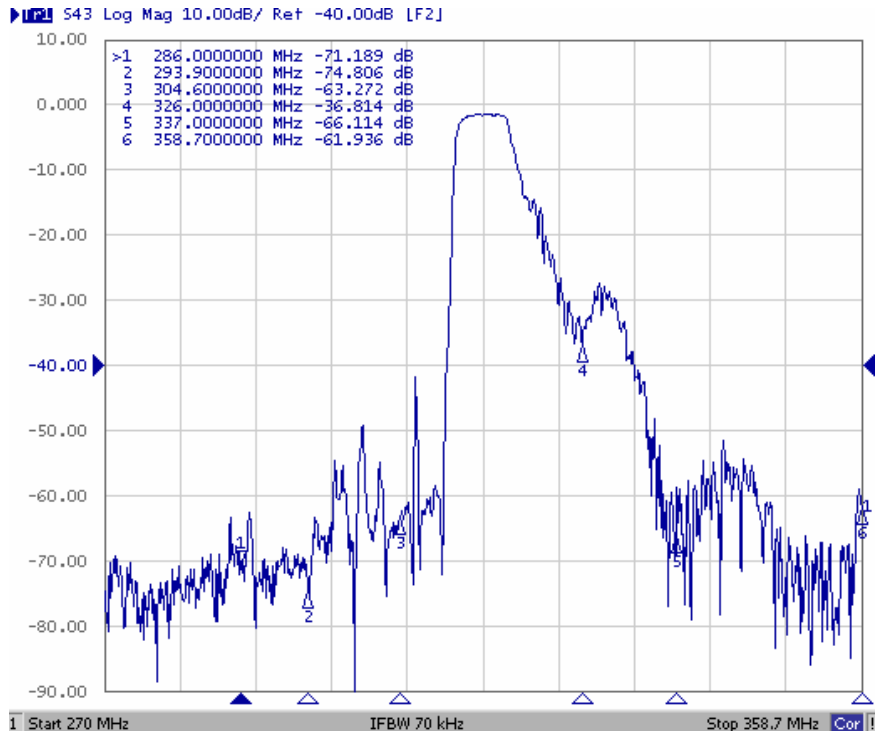


**315.00MHz SAW Filter**  
**Part No: MA09183**

**Model: TA0657A**  
**REV NO.: 1**


**D. MEASUREMENT CIRCUIT:**

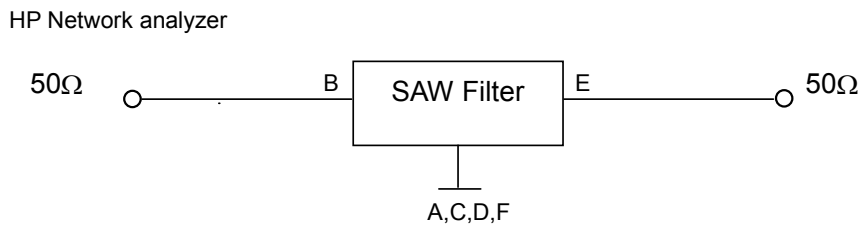

**E. OUTLINE DRAWING:**

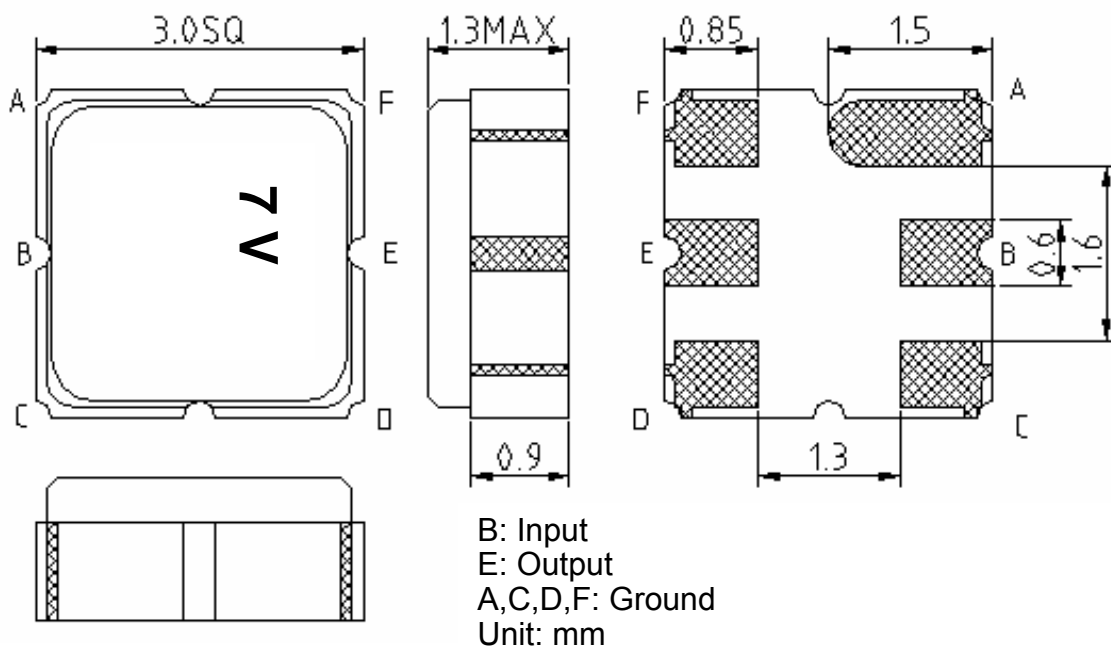

**F. PCB FOOTPRINT:**

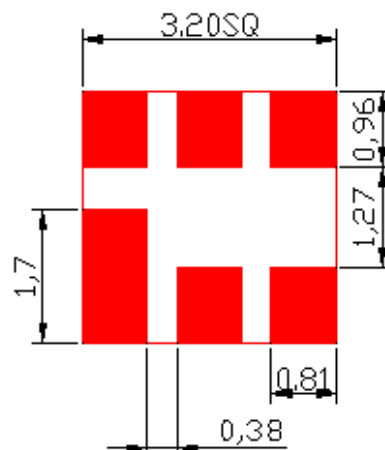



**315.00MHz SAW Filter**  
**Part No: MA09183**

**Model: TA0657A**  
**REV NO.: 1**

**H. RECOMMENDED REFLOW PROFILE:**

