

SAW Filter 165.450MHz

Model: TB0548A

Part No: MA09646

REV. NO.: 1

A. MAXIMUM RATING:

1. Input Power Level: 15 dBm
2. DC Voltage : 5V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -50°C to +95°C

B. ELECTRICAL CHARACTERISTICS:

Item	Unit	Min.	Type.	Max.	Note
Center frequency Fc	MHz	-	165.45	-	-
Insertion loss at center frequency ILc	dB	-	3.5	7.0	-
Ripple (165.44625 ~ 165.45375 MHz)	dB	-	±0.3	±1	-
Attenuation (relative to ILc)					
164.45 ~ 164.5525 MHz	dB	30	47	-	-
164.5525 ~ 165.35 MHz	dB	7	19	-	-
165.55 ~ 166.3475 MHz	dB	7	19	-	-
166.3475 ~ 166.45 MHz	dB	30	47	-	-
Temperature coefficient of frequency TCf		-0.034 ppm/C ²			


SAW Filter 165.450MHz

Model: TB0548A

Part No: MA09646


REV. NO.: 1

C. OUTLINE DRAWING:

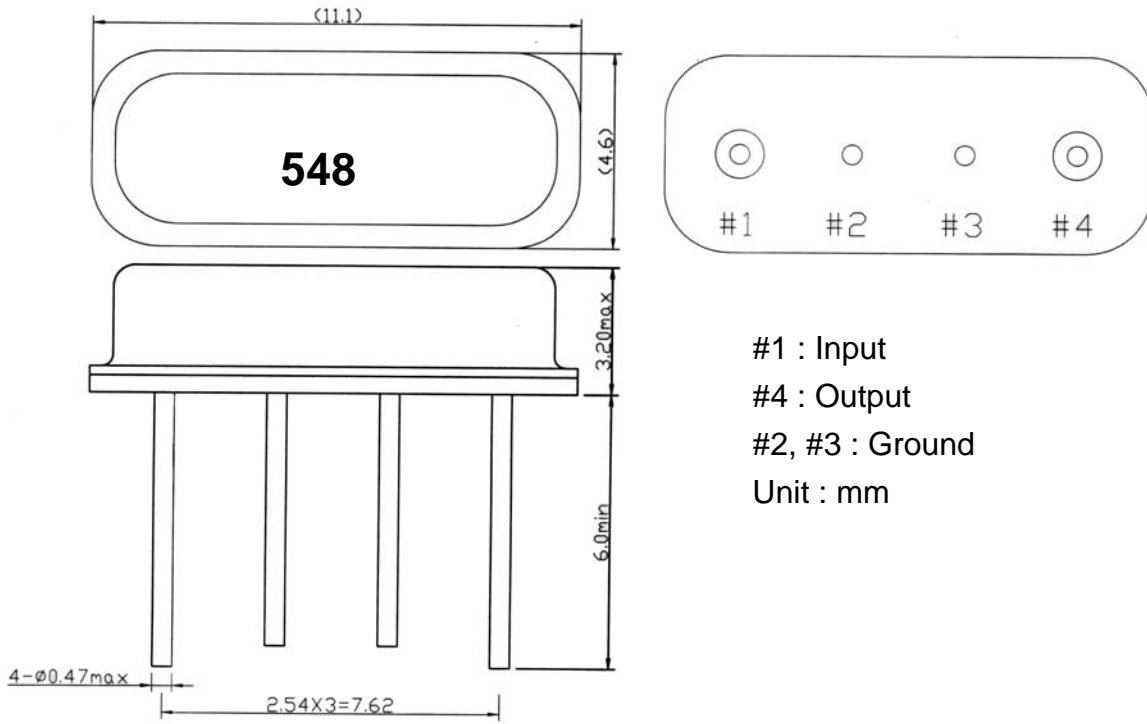

D. MEASUREMENT CIRCUIT:

50 Ohm Test circuit

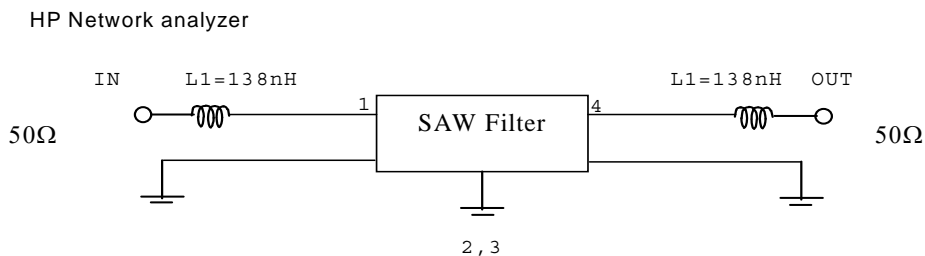


SAW Filter 165.450MHz
Part No: MA09646

Model: TB0548A
REV. NO.: 1

E. FREQUENCY CHARACTERISTICS:

S21 (Wideband)

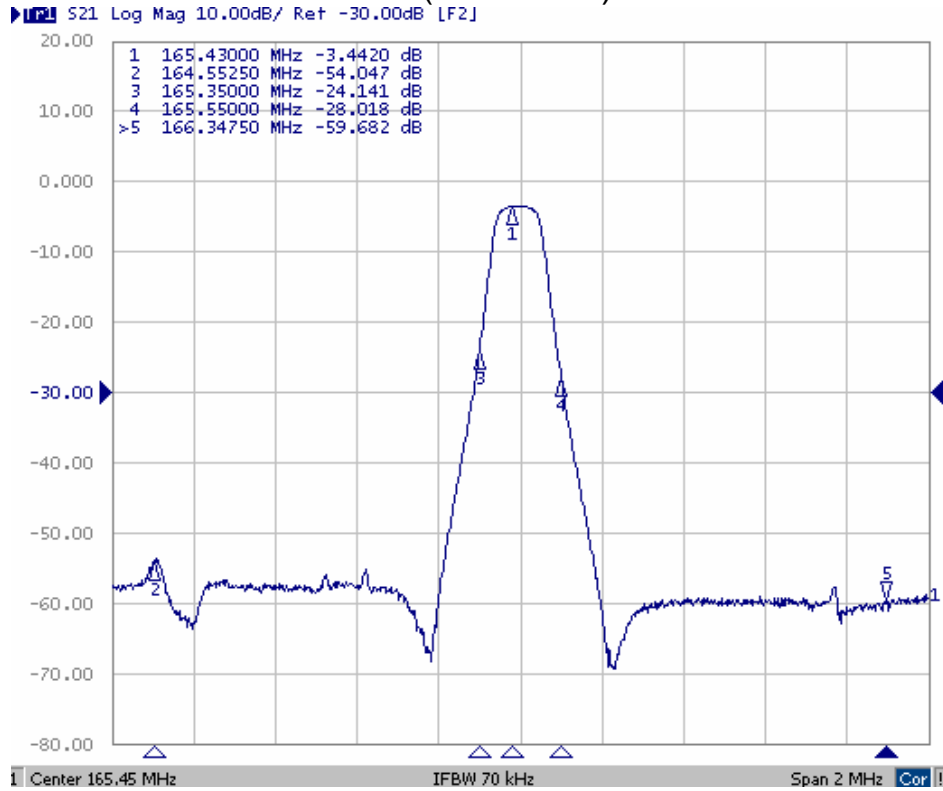

S21 (Inband)

